



产品型号	DC	OAL	D CON MS	LU	LF	TDZ	GAMF	GAMP						
	(mm)	(mm)	(mm)	(mm)	(mm)		(°)	(°)						
25A6R035M12-SAD07D-C	25	57	12.5	-	35	M12	-6.5	8	6	✓	-	✓	0.13	GI276 SQ011
32A8R043M16-SAD07D-C	32	66	17	-	43	M16	-6	8	8	✓	-	✓	0.25	GI276 SQ011


GI276	ADMX 0702..

SQ010	US 62003A-T06P	0.6	M 2	3	Flag T06P
SQ011	US 62004A-T06P	0.6	M 2	4	Flag T06P

ADMX 07





	W1	D1	L	S
	(mm)	(mm)	(mm)	(mm)
0702	4.482	2.20	6.95	2.48

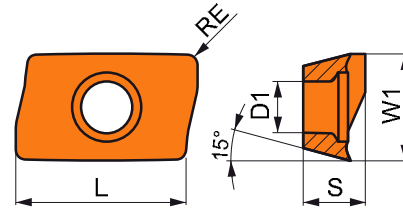



线速度(vc), 进给量(f)和切深(ap)的适用性和起始值。参考我们的Machining Calculator app, 以获得进一步的计算。

产品型号		P			M			K			N			S			H		
		vc	f	ap	vc	f	ap	vc	f	ap	vc	f	ap	vc	f	ap	vc	f	ap
	(mm)	(m/min)	(mm/tooth)	(mm)	(m/min)	(mm/tooth)	(mm)	(m/min)	(mm/tooth)	(mm)	(m/min)	(mm/tooth)	(mm)	(m/min)	(mm/tooth)	(mm)	(m/min)	(mm/tooth)	(mm)



F槽型, 具有非常锋利正前角设计, 适用于轻载加工。

ADMX 070202SR-F	M8330	0.2	220	0.07	2.0	130	0.06	2.0	-	-	-	660	0.08	2.0	55	0.05	1.6	-	-	-
	M8340	0.2	200	0.07	2.0	120	0.06	2.0	-	-	-	-	-	-	50	0.05	1.6	-	-	-
ADMX 070204SR-F	M6330	0.4	200	0.07	2.0	140	0.06	2.0	-	-	-	-	-	-	60	0.05	1.6	-	-	-
	M8310	0.4	265	0.07	2.0	135	0.06	2.0	-	-	-	-	-	-	-	-	-	-	-	-
	M8330	0.4	235	0.07	2.0	140	0.06	2.0	-	-	-	705	0.08	2.0	55	0.05	1.6	-	-	-
	M8340	0.4	215	0.07	2.0	125	0.06	2.0	-	-	-	-	-	-	50	0.05	1.6	-	-	-
ADMX 070208SR-F	M9340	0.4	290	0.07	2.0	170	0.06	2.0	-	-	-	-	-	-	70	0.05	1.6	-	-	-
	M6330	0.8	240	0.07	2.0	170	0.06	2.0	-	-	-	-	-	-	70	0.05	1.6	-	-	-
	M8310	0.8	320	0.07	2.0	160	0.06	2.0	-	-	-	-	-	-	-	-	-	-	-	-
	M8330	0.8	280	0.07	2.0	165	0.06	2.0	-	-	-	840	0.08	2.0	70	0.05	1.6	-	-	-
	M8340	0.8	255	0.07	2.0	150	0.06	2.0	-	-	-	-	-	-	60	0.05	1.6	-	-	-




M槽型, 具有前角设计, 适用于轻载到中等加工。

ADMX 070202SR-M	8215	0.2	210	0.09	2.2	125	0.08	2.2	195	0.09	2.2	630	0.11	2.2	50	0.06	1.8	-	-	-
	M8330	0.2	205	0.09	2.2	120	0.08	2.2	190	0.09	2.2	615	0.11	2.2	50	0.06	1.8	-	-	-
	M8340	0.2	185	0.09	2.2	110	0.08	2.2	175	0.09	2.2	-	-	-	45	0.06	1.8	-	-	-



线速度(vc), 进给量(f)和切深(ap)的适用性和起始值。参考我们的Machining Calculator app, 以获得进一步的计算。

产品型号	RE (mm)	P			M			K			N			S			H		
		vc (m/min)	f (mm/tooth)	ap (mm)	vc (m/min)	f (mm/tooth)	ap (mm)	vc (m/min)	f (mm/tooth)	ap (mm)	vc (m/min)	f (mm/tooth)	ap (mm)	vc (m/min)	f (mm/tooth)	ap (mm)	vc (m/min)	f (mm/tooth)	ap (mm)




M槽型, 具有前角设计, 适用于轻载到中等加工。

ADMX 070204SR-M	8215	0.4	225	0.09	2.2	135	0.08	2.2	210	0.09	2.2	675	0.11	2.2	55	0.06	1.8	-	-	-
	M6330	0.4	190	0.09	2.2	135	0.08	2.2	-	-	-	-	-	-	55	0.06	1.8	-	-	-
	M8310	0.4	245	0.09	2.2	120	0.08	2.2	230	0.09	2.2	-	-	-	-	-	-	-	-	-
	M8330	0.4	220	0.09	2.2	130	0.08	2.2	205	0.09	2.2	660	0.11	2.2	55	0.06	1.8	-	-	-
	M8340	0.4	200	0.09	2.2	120	0.08	2.2	190	0.09	2.2	-	-	-	50	0.06	1.8	-	-	-
	M9340	0.4	265	0.09	2.2	155	0.08	2.2	-	-	-	-	-	-	65	0.06	1.8	-	-	-
ADMX 070208SR-M	8215	0.8	270	0.09	2.2	160	0.08	2.2	255	0.09	2.2	810	0.11	2.2	65	0.06	1.8	-	-	-
	M6330	0.8	225	0.09	2.2	160	0.08	2.2	-	-	-	-	-	65	0.06	1.8	-	-	-	
	M8310	0.8	290	0.09	2.2	145	0.08	2.2	275	0.09	2.2	-	-	-	-	-	-	-	-	
	M8330	0.8	260	0.09	2.2	155	0.08	2.2	245	0.09	2.2	780	0.11	2.2	65	0.06	1.8	-	-	-
	M8340	0.8	240	0.09	2.2	140	0.08	2.2	225	0.09	2.2	-	-	-	60	0.06	1.8	-	-	-
	M9340	0.8	315	0.09	2.2	185	0.08	2.2	-	-	-	-	-	75	0.06	1.8	-	-	-	
ADMX 070212SR-M	M8340	1.2	250	0.09	2.2	150	0.08	2.2	235	0.09	2.2	-	-	-	60	0.06	1.8	-	-	-
ADMX 070216SR-M	M8310	1.6	320	0.09	2.2	160	0.08	2.2	300	0.09	2.2	-	-	-	-	-	-	-	-	
	M8330	1.6	290	0.09	2.2	170	0.08	2.2	275	0.09	2.2	870	0.11	2.2	70	0.06	1.8	-	-	-
	M8340	1.6	265	0.09	2.2	155	0.08	2.2	250	0.09	2.2	-	-	-	65	0.06	1.8	-	-	-
ADMX 070220SR-M	M6330	2.0	260	0.09	2.2	185	0.08	2.2	-	-	-	-	-	75	0.06	1.8	-	-	-	
	M8310	2.0	340	0.09	2.2	170	0.08	2.2	320	0.09	2.2	-	-	-	-	-	-	-	-	
	M8330	2.0	300	0.09	2.2	180	0.08	2.2	285	0.09	2.2	900	0.11	2.2	75	0.06	1.8	-	-	-
	M8340	2.0	275	0.09	2.2	165	0.08	2.2	260	0.09	2.2	-	-	-	65	0.06	1.8	-	-	-

ADEX 07-HF




	W1 (mm)	D1 (mm)	L (mm)	S (mm)
0702	4.439	2.20	6.45	2.48

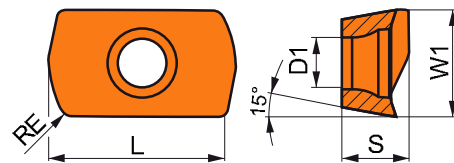

线速度(vc), 进给量(f)和切深(ap)的适用性和起始值。参考我们的Machining Calculator app, 以获得进一步的计算。

产品型号	RE (mm)	P			M			K			N			S			H		
		vc (m/min)	f (mm/tooth)	ap (mm)	vc (m/min)	f (mm/tooth)	ap (mm)	vc (m/min)	f (mm/tooth)	ap (mm)	vc (m/min)	f (mm/tooth)	ap (mm)	vc (m/min)	f (mm/tooth)	ap (mm)	vc (m/min)	f (mm/tooth)	ap (mm)



HF槽型, 具有大正前角设计, 适用于快进给。


ADEX 070206SR-HF	M6330	0.6	200	0.60	0.3	140	0.54	0.3	-	-	-	-	-	-	-	-	-	-	-
	M8330	0.6	225	0.60	0.3	135	0.54	0.3	-	-	-	-	-	-	-	-	-	-	-
	M8340	0.6	215	0.60	0.3	125	0.54	0.3	-	-	-	-	-	-	-	-	-	-	-



ADEX 07-FA





	W1	D1	L	S
	(mm)	(mm)	(mm)	(mm)
0702	4.497	2.20	6.95	2.48

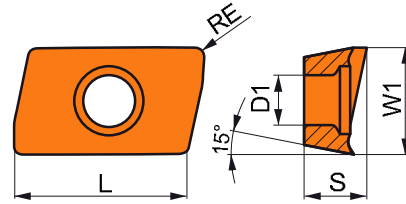

线速度(vc), 进给量(f)和切深(ap)的适用性和起始值。参考我们的Machining Calculator app, 以获得进一步的计算。

产品型号	RE	P			M			K			N			S			H		
		vc	f	ap	vc	f	ap	vc	f	ap	vc	f	ap	vc	f	ap			
	(mm)	(m/min)	(mm/tooth)	(mm)	(m/min)	(mm/tooth)	(mm)	(m/min)	(mm/tooth)	(mm)	(m/min)	(mm/tooth)	(mm)	(m/min)	(mm/tooth)	(mm)	(m/min)	(mm/tooth)	(mm)



FA槽型, 具有大正前角设计, 适用于精加工到中等加工。

ADEX 070204FR-FA	HF7	0.4	-	-	-	-	-	-	240	0.18	3.0	-	-	-	-	-	-	-	-
	M0315	0.4	-	-	-	-	-	-	555	0.18	3.0	-	-	-	-	-	-	-	-
ADEX 070208FR-FA	HF7	0.8	-	-	-	-	-	-	285	0.18	3.0	-	-	-	-	-	-	-	-